

**75**  
YEARS  
1947 – 2022



**EasyWrap**  
BY FROMM

**FROMM** | WRAPPING  
SOLUTIONS

[www.fromm-pack.com](http://www.fromm-pack.com)

**FV300 Series**  
Semi-Automatic  
Vertical Wrapping Machines


# FV300 Series

The FV300 Series, semi-automatic vertical wrapping machines, with their High-Speed Twin Film roll wrapping technology, belong to the FROMM EasyWrap™ family of wrapping machines. They are Plug-and-Play Easy to install, to operate and to move. Changing film rolls is a breeze.

Due to their simple, straightforward construction and the use of branded parts, they are durable, reliable, Easy to maintain and energy efficient.

The FV300 Series have 6 different ring diameters available, from 50 to 250cm (19.7 - 98"). Ideally suited for quickly and efficiently wrapping and/or bandaging all kinds of products, in small series or single pieces; long simple bundles or irregular products.

The FV300 Series is produced in the EU, offering you a highly competitive price/performance. ratio.

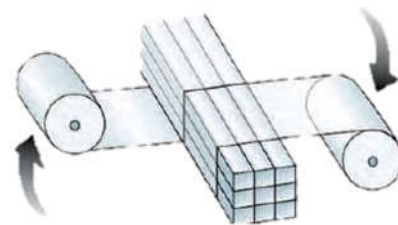

## Features and Benefits

- Safe and Sound for carefree and Long-Life operation.
- Its durable and accessible design makes it Easy to maintain.
- A choice of various ring diameters enables you to select an optimal ring/package ratio, for the best wrapping result.
- The Twin Film Roll Dispenser allows you to wrap up to 1.8x faster than usual, with single roll technique.
- The robust foot pedal control allows the operator to pass the product through with both hands, during the wrapping process.
- The closed wrapping ring construction offers your employees extra security during the wrapping process.
- Both film roll holders are equipped with a mechanical brake, which allows you to stretch the film as needed for the desired wrapping result.
- The wrapping speed can be adjusted as needed, taking into account the film used, package shape and length.
- Various optional features available, including a film cutting device, pressers and package guide rollers.
- CE certified



## Technical Data

- Power supply & consumption 230V 50/60Hz 0,26-0,55 kWh
- Air pressure, required to operate the film cutting device (option) 6 Bar.
- Ring speed, adjustable between 5-350 rpm.
- Ring speed inverter and PLC: Fuji and Omron
- Ring diameters : 50 / 90 / 125 / 160 / 200 / 250 cm
- (19.7 / 35 / 49 / 63 / 78 / 98")
- Processes film thicknesses: 17 / 20 / 23 / 30 micron
- Handles film roll widths: 100 / 170 or 250 mm (39 / 67 / 98")



Ask your FROMM representative for more information and discuss any need for pre-testing with different products.

**FROMM** | WRAPPING SOLUTIONS

[www.fromm-pack.com](http://www.fromm-pack.com)

Your FROMM distributor