



FROMM | WRAPPING
SOLUTIONS

www.fromm-pack.com

FV350 Series
Automatic
Vertical Wrapping Machines

FV350 Series

The FV350 Series automatic vertical wrapping machines, with their High-Speed Twin Film roll wrapping technology, belong to the FROMM EasyWrap™ family of wrapping machines. Prepared to fit easily and quickly into any system. Installation, integration and commissioning require no additional preparation or adjustments. Changing film rolls is a breeze.

Their simple, straightforward construction and the use of branded parts, make them extremely durable, reliable, easy to maintain and energy efficient. The FV350 Series have 6 different ring diameters available, from 50 to 250cm (19.7 - 98"). Ideally suited for quickly and efficiently automatic wrapping and/or bandaging all kinds of products, in series or single pieces; long simple bundles or irregular products.

The FV350 Series is produced in the EU, offering you a highly competitive price/performance ratio.


Features and Benefits

- CE certified.
- Safe and Sound for carefree and Long-Life operation, Easy to maintain.
- Automatic film clamping (attaching) and cutting (end of cycle) device.
- The installed PLC makes it fully prepared to be Easily integrated into automatic packaging lines and communicate with other controls.
- A choice of various ring diameters enables you to select an optimal ring/package ratio, for the best and most consistent wrapping result.
- The Twin Film Roll Dispenser allows you to wrap up to 1.8x faster than usual, with single roll technique.
- A well positioned robust touch screen Operating Panel (OP), to Easily manage the settings of your FV350, for the best and a consistent wrapping result.
- The closed wrapping ring construction offers your employees extra security during the wrapping process.
- Both film roll holders are equipped with a mechanical brake, which allows you to stretch the film as needed for the desired wrapping result.
- Various optional features available, including package presses and guides, roller and belt conveyors, connectors to external systems, electronic photocells for pack detection and many more.



Technical Data

- Power supply & consumption 230V 50/60Hz 0,4 - 1,66 kWh
- Required air pressure (film cutting device and presses) 6 Bar.
- Ring speed, adjustable between 5 - 350 rpm.
- Ring speed inverter and PLC: Fuji and Omron
- Ring diameters : 50 / 90 / 125 / 160 / 200 / 250 cm (19.7 / 35 / 49 / 63 / 78 / 98")
- Processes film thicknesses: 17 / 20 / 23 / 30 micron
- Handles film roll widths: 100 / 170 or 250 mm (39 / 67 / 98")
- Conveyor speed: up to 30 m/min.

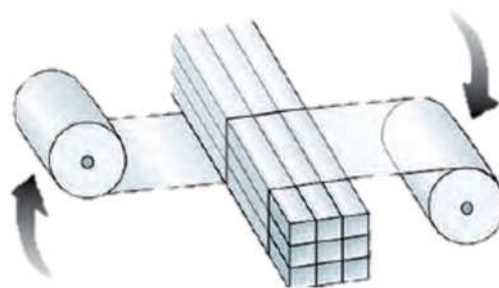

Ask your FROMM representative for more information and discuss any need for pre-testing with different products.

FROMM | WRAPPING SOLUTIONS

www.fromm-pack.com

Your FROMM distributor